



10/06/00

10-10-00

A

PATENT APPLICATION

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Case Docket No. FMCV0116PUS/
199-1368

Date: October 6, 2000

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

Benjamin Sweet, Jack Marshall, and Charles Weber

For: **METHOD AND SYSTEM FOR SEAMLESS TRANSITION BETWEEN MULTIPLE FEEDBACK RANGES**



Enclosed are:

- ☒ 4 sheet(s) of drawings
- ☐ Assignment and Cover Sheet
- ☐ Information Disclosure Statement, PTO Form 1449, and Copies of Citations
- ☐ A certified copy of

The filing fee has been calculated as shown below for OTHER THAN A SMALL ENTITY:

FOR	NO. FILED	NO. EXTRA	RATE	FEE
Basic Fee				\$ 690
Total Claims	11	0	18	\$ 0
Indep Claims	2	0	78	\$ 0
Multiple Dependent Claims(s)	0		260	\$ 0
Presented				
			TOTAL	\$ 690

- ☒ Please charge Deposit Account No. 06-1500 in the amount shown next to the Total. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-1500. A duplicate copy of this sheet is enclosed.
 - Any additional filing fees required under 37 CFR 1.16.
 - Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-1500.
 - Any patent application processing fees under 37 CFR 1.17.
 - Any filing fees under 37 CFR 1.16 for presentation of extra claims.

"Express Mail"

Mailing Label Number EL 481 736 743 US

Date of Deposit October 6, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service

"Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Box Patent Application, Commissioner for Patents, United States Patent & Trademark Office, Washington, D.C. 20231


Ralph E. Smith
Attorney or Agent of Record
Registration No. 35,474
Brooks & Kushman P.C.
1000 Town Center
Twenty-Second Floor
Southfield, MI 48075

LORRAINE SCHNEIDER

(Printed Name of Person Mailing Paper or Fee.)


(Signature of Person Mailing Paper or Fee)

**METHOD AND SYSTEM FOR SEAMLESS TRANSITION
BETWEEN MULTIPLE FEEDBACK RANGES**

Technical Field

5 The present invention generally relates to
feedback control arrangements, and more particularly, to
an improved feedback arrangement that accurately process
multiple feedback control signals having different
ranges or scale factors.

Background Art

10 Generally, in feedback control systems,
information from feedback sensors is used to measure and
ultimately control a system's output parameters or
control signals. Difficulty arises in converting the
feedback signal into an electrical or digital format
15 when a system is required to support high resolution,
i.e., how fine the measurement is, over a large range of
operation, i.e., the possible range of the measurements.
One solution to this problem is to use multiple sensors
having outputs tailored to cover different ranges within
20 the total measurement range. Each sensor is then
provided with sufficient resolution within the
designated range.

25 Alternatively, another solution is to pass the
output of a single sensor through multiple amplifiers,
where each amplifier is designed to operate only within
a designated range of the total measurement range.
Again, each amplifier is arranged to provide sufficient
resolution within the designated range. While either

solution can achieve the desired resolution and large size of measurement range, neither solution is able to transition smoothly between the multiple feedback sources or ranges.

5 For example, in either situation, i.e., a single sensor having a feedback signal processed into multiple gains, or multiple sensors having different gains, a sensor (or gain) is selected by a control process based on a desire to use a feedback signal
10 within the associated range or gain. In this situation, the control process will continue to use the output signal from the selected range as long as the output signal remains below a particular threshold value. If the output signal exceeds the threshold value, the
15 control process switches to processing the output signal associated with an adjacent range or gain.

 The problem encountered with such an arrangement results from any mismatch or "error" between the two signals when transitioning between the two
20 ranges. This is particularly true if the two ranges have a different resolution. In such a situation, the control process is likely to respond to the error between the transitioned to value and the actual measured value of the second range by generating a
25 "bump" or "glitch" in the controller output. Such bumps or glitches are generally not acceptable where accuracy is desired in the control process.

 Therefore, a need exists for an arrangement that can process multiple feedback signals of different
30 range in such a manner as to produce a smooth, or seamless, transition between the different ranges.

Disclosure Of The Invention

Therefore, it is an object of the present invention to provide a method and system for processing multiple feedback signals of different ranges which
5 provides a seamless transition when switching between the different ranges.

In accordance with this and other objects, the present invention provides a method and system for providing seamless transition between a plurality of
10 sensor measurement ranges, where a particular sensor output corresponding to one of the plurality of sensor measurement ranges is selected as an input signal for a control process, and a determination is made as to whether the range of the selected sensor output is of a
15 sensitivity higher than a predetermined sensitivity. If the sensitivity is higher, the value of a higher sensitivity sensor output is converted to a value corresponding to the predetermined sensitivity range. An error value is determined between the converted
20 sensor output value and a sensor output corresponding to a range having the predetermined sensitivity. The sensor output is then modified based on the error value when the control process switches from the selected sensor output to the sensor output corresponding to the
25 range of predetermined sensitivity.

Thus, the present invention advantageously avoids any "bump" or "glitch" in a controller output upon a transition between different sensors or different sensor gains, thereby resulting in smoother control
30 operation and a higher quality product. In addition, a control process can use lower resolution (having a lower

cost) A/D converter and still achieve acceptable sensor/control accuracy.

The above object and other objects, features and advantages of the present invention are more readily understood from a review of the attached drawings and the accompanying specification and claims.

Brief Description Of The Drawings

Figure 1 is block diagram of a control process in accordance with the present invention;

Figure 2 is a flowchart illustrating the overall process for providing a seamless transition between different sensor ranges in accordance with the present invention;

Figures 3(a)-(d) are graphs illustrating application of the present invention to four different sensor examples; and

Figure 4 is a flowchart illustrating an exemplary embodiment of the present invention.

Best Modes For Carrying Out The Invention

Referring first to Figure 1, a control system having a feedback control input is shown in accordance with an exemplary embodiment of the present invention. More specifically, a control processor 12 is coupled to a sensor arrangement 14 capable of producing one or more signals 16 indicative of measurements made at different response ranges/scales, i.e., different sensitivities.

For example, one output can be indicative of sensor measurements made within a range representing a

total system range of measurement, i.e., a base or
common system resolution. One or more additional
outputs can be indicative of a subset of the total
system range magnified to provide increased measurement
5 resolution. Sensor arrangement can include multiple
sensors each having an output tailored to cover a
different range within the total measurement range.
Each sensor can be arranged in accordance with known
design techniques to produce a desired resolution within
10 the designated range. Alternatively, the output of a
single sensor can be processed through multiple
amplifiers. Each amplifier is designed to operate only
within a designated range of the total measurement
range, and to provide the desired resolution within the
15 designated range.

Control processor 12 includes suitable
programming to process the sensor output to generate one
or more control or monitoring signals 18. The
programming and control signals are derived in
20 accordance with the intended application of the control
system. For example, sensor arrangement 14 can be
coupled to measure the position of a vehicle throttle
plate, and controller 12 can form part of the engine
control system for controlling movement of the throttle
25 plate to a desired position.

Referring now to Figure 2, a flow chart
illustrates processing of the multiple range sensor
output in accordance with the present invention.
Specifically, as denoted at block 100, the current range
30 of operation of the sensor output is determined or
selected. For example, this can be accomplished by
comparing the sensor output to a predetermined threshold
value. If the output signal is less than the threshold

value, the sensor signal is within a higher resolution range as noted at block 102, such as represented as range B in the graphs of Figures 3(a)-(d) described below. The lower resolution or base system range is
5 selected if the output signal is out of range.

When the sensor output is currently operating in a range of higher sensitivity, the output signal is mapped or converted at block 104 into a value of the base resolution range, or other common or desired
10 operating range, i.e., B'. In addition, when the system is using the higher resolution range/sensor output, the process also generates a value which can be used to offset or update the sensor output when operating in the lower resolution range.

15 More specifically, as denoted at block 106, an error signal is determined by subtracting the actual measured value corresponding to the base system range from the mapped value. As indicated at block 108, the error signal is stored and/or updated for use by the
20 processor when operating lower resolution range. The process returns to block 100.

Referring again to the decisional block at 102, if the selected output is not within the higher resolution, the sensor output corresponding to the lower
25 resolution or base system range is used as indicated at block 110. The lower resolution range is denoted as range A in Figures 3(a)-(d). As shown at block 112, the stored error value is then used by the control processor to modify the lower resolution sensor output.

30 Thus, with the present invention, the best range can be selected, while the inaccuracies of a lower resolution range can be offset based on previous operation in the higher range. This in turn eliminates

or significantly reduces any "bump" or glitch resulting from an erroneous control signal generated by switchover between the higher and lower resolution ranges.

Referring now to the graphs of Figures 3(a)-
5 (d), operation of the present invention is shown by plotting two different sensor responses, A and B, as a function of the associated sensor range and sensor output values. Figure 3(a) illustrates an example where output A and B are both positive values, i.e., their
10 respective response lines have a positive slope. As shown by dotted line 20, when the system is operating using output B (i.e., B is below the threshold value), the value of output B is simultaneously remapped to a value B' to produce a value in the same range as output
15 A but having a higher resolution. The difference between line 20 and line A is the error signal used to offset output A, particularly when transitioning from use of output B to output A.

Likewise, Figure 3(b) illustrates a situation
20 where the B range is negative, i.e., the slope of line b is negative, while the A range is positive. As shown, remapping of the B values to B' values adjusts the sign of the B values so as to allow a proper comparison with the A range. Thus, the B' values can be remapped to a
25 positive value. With respect to selecting the desired signal, it is noted that in a situation as represented in Figure 3(b). i.e., signal B has a negative slope, signal B' is used if signal B is greater than the threshold value.

30 In Figure 3(c), both output ranges A and B are negative. In this situation, the values of output A can likewise be simultaneously remapped to the common range as denoted by line A'. As with the situation

represented in Figure 3(b), negative values for both output A and B can then be properly compared as equivalent values in the common range.

Figure 3(d) illustrates an example where
5 output A is negative, and output B is positive. Again, output A is simultaneously remapped to a positive value A' in the common range, and output B is remapped as in Figure 3(a).

Each situation shown in Figures 3(a)-(d) can
10 be represented by the following logic statement:

```
If Signal B < Threshold Value
Then Signal B is in range: Thus,
    B'=Signal B re-mapped into common range
    Use Signal B'
15    error = B' - Signal A
Else, Signal B is out of range: Thus,
    Use Signal A + last known error value
End If.
```

Thus, the present invention advantageously
20 avoids any "bump" or "glitch" in a controller output upon a transition between different sensors or different sensor gains, thereby resulting in smoother control operation and a higher quality product. In addition, a control process can use a lower resolution (having a
25 lower cost) A/D converter and still achieve acceptable sensor/control accuracy. For example, with respect to a controller for controlling the position of a vehicle throttle plate, a 10-bit A/D converter can be used but still achieve the resolution of a 12-bit A/D converter
30 by using a gain of 4 for smaller range values. Such an exemplary embodiment is shown in the flow chart of Figure 4, where "tp" is used to designate "throttle

position" in connection with a throttle position sensing system.

More specifically, as denoted at block 100, respective variables are initialized as follows:

5 intra_tp_error is set to 0, RELATIVE_TP_GAIN is set to -2.5, and TRANSITION_THRESHOLD is set to a specific value such as 4 volts. At block 102, the sensor absolute voltage values, i.e., tp_high_res_absolute and tp_low_res_absolute are read from the A/D converter
10 output. The absolute values are then converted to relative voltage levels at block 104 by subtracting a close_stop_high_res value and close_stop_low_res value from the high and low resolution absolute values, respectively.

15 As denoted at block 106, the control process then determines which sensor to use for control. More specifically, if tp_high_res < TRANSITION_THRESHOLD, the TP sensors are made to have an equivalent slope as denoted at block 108. This is done by scaling
20 tp_high_res via multiplication with RELATIVE_TP_GAIN to produce tp_high_res_scaled. After scaling, the high resolution sensor output is used for feedback control at block 110, i.e., feedback_signal = tp_high_res_scaled. As denoted at block 112, any error between the low
25 resolution sensor and the high resolution sensor is tracked and stored to provide for a smooth transition upon switching back to use of the low resolution sensor output for feedback control. This process is shown as intra_tp_error = tp_high_res_scaled - tp_low_res. The
30 control process then returns to block 102.

Referring again to block 106, if tp_high_res is not greater than TRANSITION_THRESHOLD, the low resolution sensor output is corrected or updated at

block 114 by combining with the most recently stored value for intra_tp_error. After correction, the low resolution sensor output is used for feedback control at block 116. The control process then returns to block 102.

While the present invention has been specifically described in connection with feedback sensor signals of different ranges, the present invention is likewise applicable to multiple input signals of different ranges. Thus, signals A and B can represent a controller's reference input signals, i.e., a command signal instead of the feedback signal.

Therefore, it is understood that while the form of the invention herein shown and described constitutes a preferred embodiment of the invention, it is not intended to illustrate all possible forms thereof. It will also be understood that the words used are words of description rather than limitation, and that various changes may be made without departing from the spirit and scope of the invention disclosed.

What Is Claimed Is:

1 1. A method for providing seamless transition
2 between a plurality of sensor measurement ranges
3 comprising:
4 selecting a sensor output corresponding to one
5 of the plurality of sensor measurement ranges as an
6 input signal for a control process;
7 determining if the range of the selected
8 sensor output is of a sensitivity higher than a
9 predetermined sensitivity;
10 converting the value of a higher sensitivity
11 sensor output to a value corresponding to the
12 predetermined sensitivity range;
13 determining an error value between the
14 converted sensor output value and a sensor output
15 corresponding to a range having the predetermined
16 sensitivity; and
17 modifying the sensor output based on the error
18 value when switching from the selected sensor output to
19 the sensor output corresponding to the range of
20 predetermined sensitivity.

1 2. The method of claim 1 wherein the
2 selected sensor output is used as a feedback input to
3 the control process.

1 3. The method of claim 1 wherein selecting
2 the sensor output comprises comparing a received sensor
3 output to a threshold value, and determining whether the
4 received sensor output is within range based on the
5 outcome of the comparison.

1 4. The method of claim 1 wherein the range
2 having the predetermined sensitivity corresponds to a
3 total system response range, and the range having a
4 higher sensitivity corresponds to a subset within the
5 total response range.

1 5. The method of claim 1 wherein the
2 selected sensor output is used as a feedback input for
3 controlling position of a throttle plate on a vehicle
4 engine.

1 6. A system for providing seamless
2 transition between a plurality of sensor measurement
3 ranges comprising:

4 a sensor arrangement for providing output
5 signals corresponding to the plurality of measurement
6 ranges, wherein the measurement ranges have different
7 levels of sensitivity; and

8 a controller coupled to the sensor arrangement
9 for receiving the sensor outputs, said controller
10 arranged to select a sensor output corresponding to one
11 of the plurality of sensor measurement ranges as an
12 input signal for a control process, determine if the
13 range of the selected sensor output is of a sensitivity
14 higher than a predetermined sensitivity, convert the
15 value of a higher sensitivity sensor output to a value
16 corresponding to the predetermined sensitivity range,
17 determine an error value between the converted sensor
18 output value and a sensor output corresponding to a
19 range having the predetermined sensitivity, and modify
20 the received sensor output based on the error value when
21 switching from the selected sensor output to a sensor

22 output corresponding to the range of predetermined
23 sensitivity.

1 7. The system of claim 6 wherein the sensor
2 arrangement comprises a plurality of different sensors
3 each arranged to generate an output at a particular
4 sensitivity.

1 8. The system of claim 6 wherein the sensor
2 arrangement comprises a sensor having a processing
3 circuit arranged to generate multiple outputs of
4 differing sensitivity.

1 9. The system of claim 6 wherein the
2 controller is arranged to determine whether the
3 sensitivity of the selected sensor output is higher by
4 comparing a received sensor output to a threshold value,
5 and determining whether the received sensor output is
6 within range based on the outcome of the comparison.

1 10. The system of claim 6 wherein the range
2 having the predetermined sensitivity is arranged to
3 correspond to a total system response range, and the
4 range having a higher sensitivity is arranged to
5 correspond to a subset within the total response range.

1 11. The system of claim 1 wherein the
2 controller is further arranged to use the received
3 sensor outputs as a feedback for controlling a position
4 of a throttle plate on a vehicle engine.

Abstract Of The Disclosure

A method and system are provided for processing multiple sensor output signals of different ranges/sensitivities so as to provide a seamless transition when switching between the different ranges.

More specifically, a determination is made as to whether a selected sensor output range is of a sensitivity higher than a predetermined sensitivity. If the sensitivity is higher, the value of a higher sensitivity sensor output is converted to a value corresponding to the predetermined sensitivity range. An error value is then determined between the converted sensor output value and a sensor output corresponding to a range having the predetermined sensitivity. The sensor output is then modified based on the error value when the control process switches from the selected sensor output to the sensor output corresponding to the predetermined sensitivity. This insures that no glitches will occur in a controller output at the time of switchover.

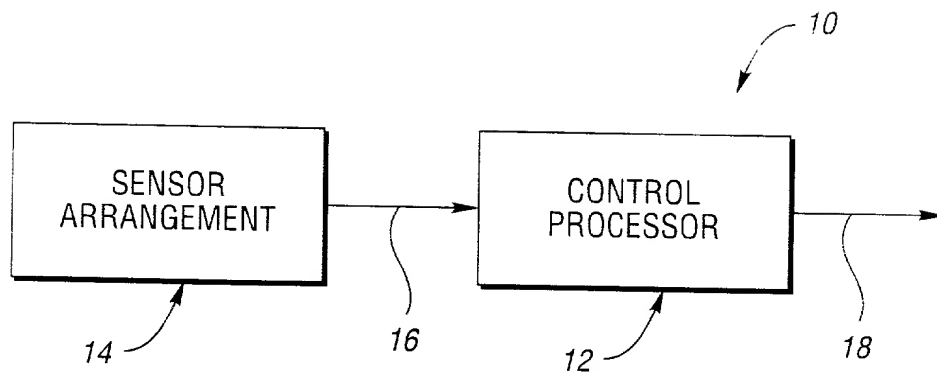


Fig. 1

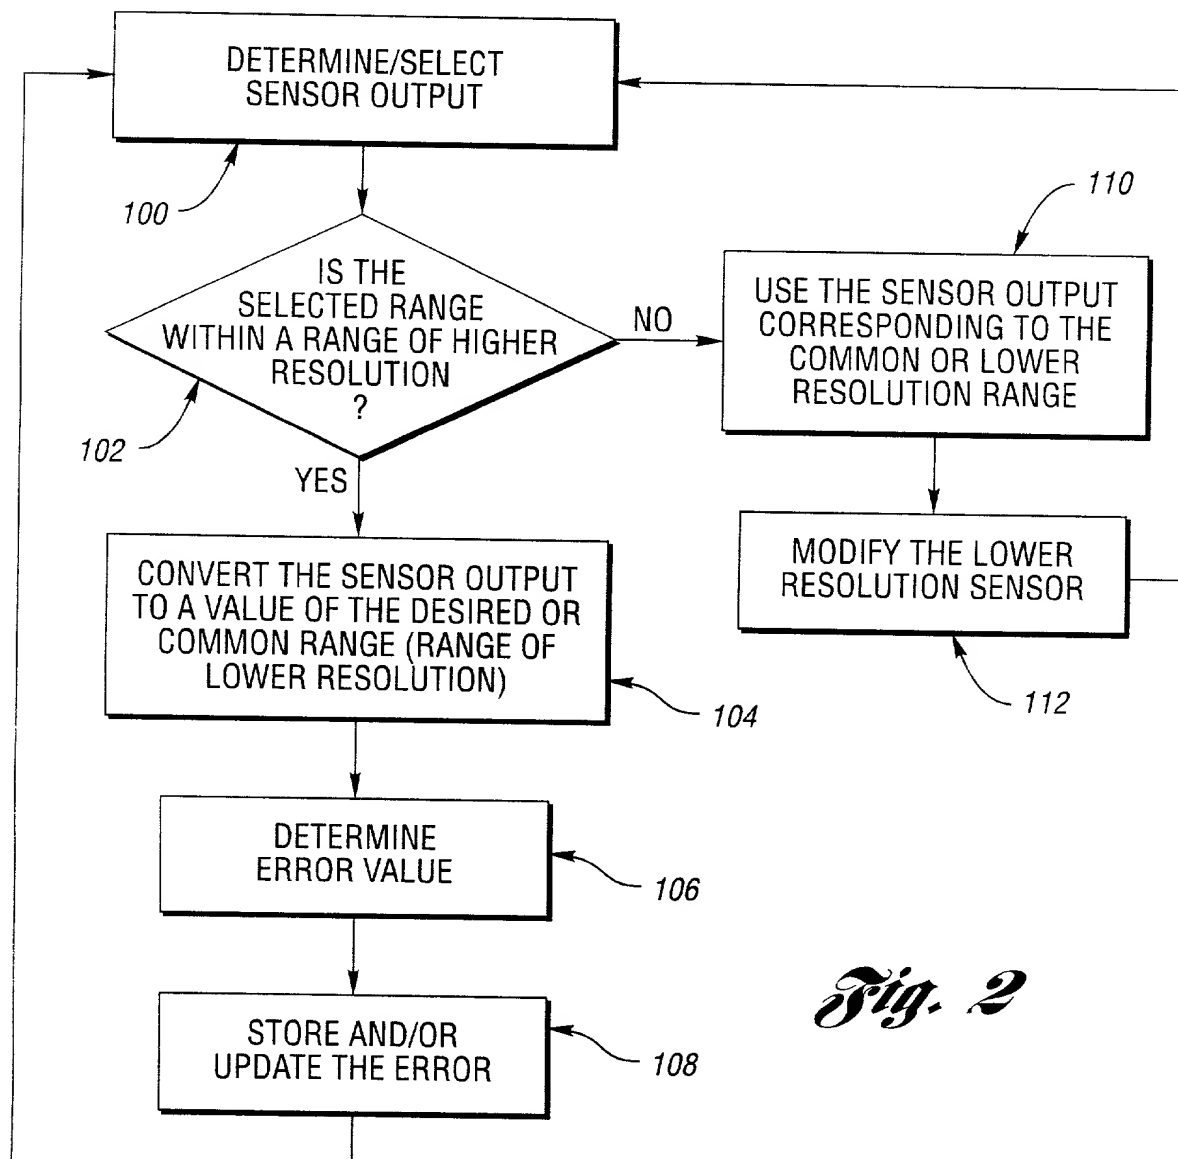


Fig. 2

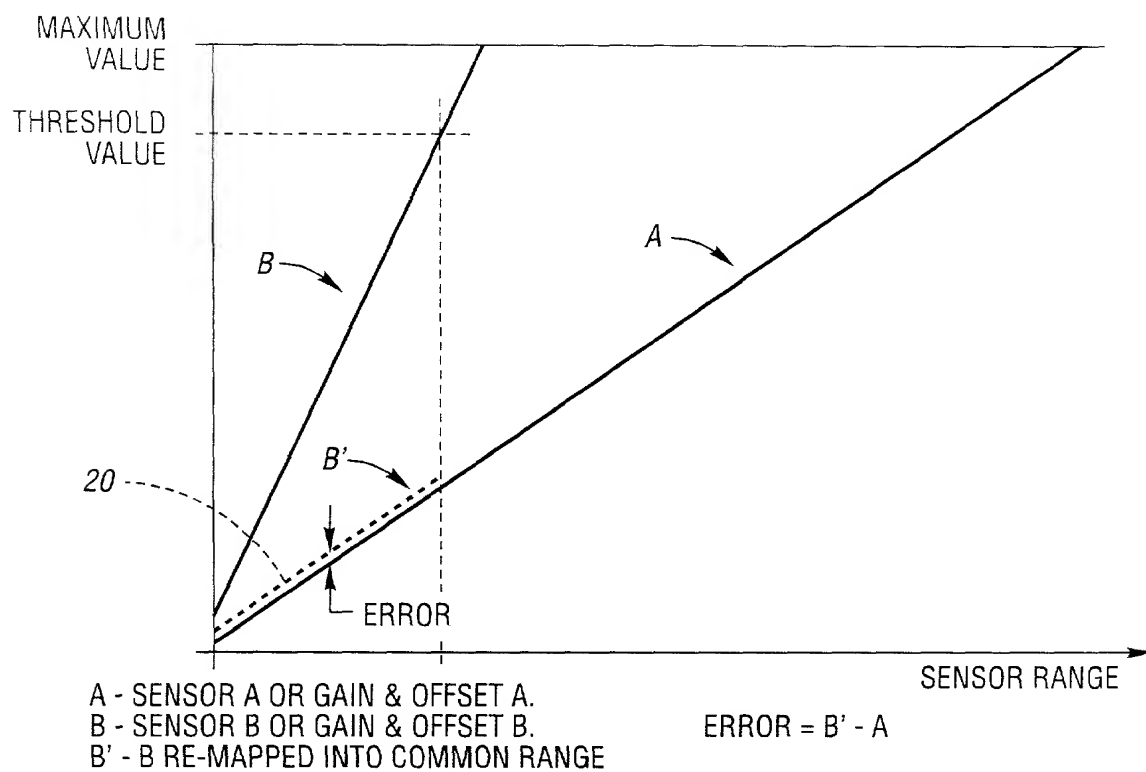


Fig. 3a

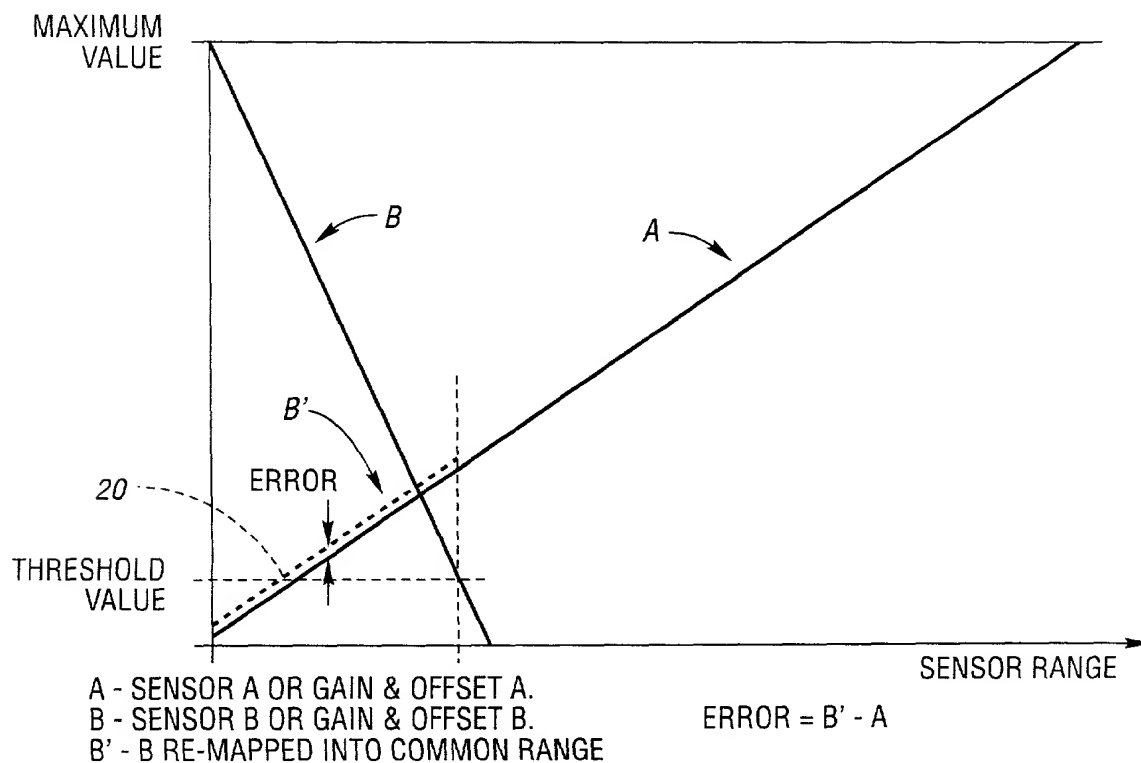
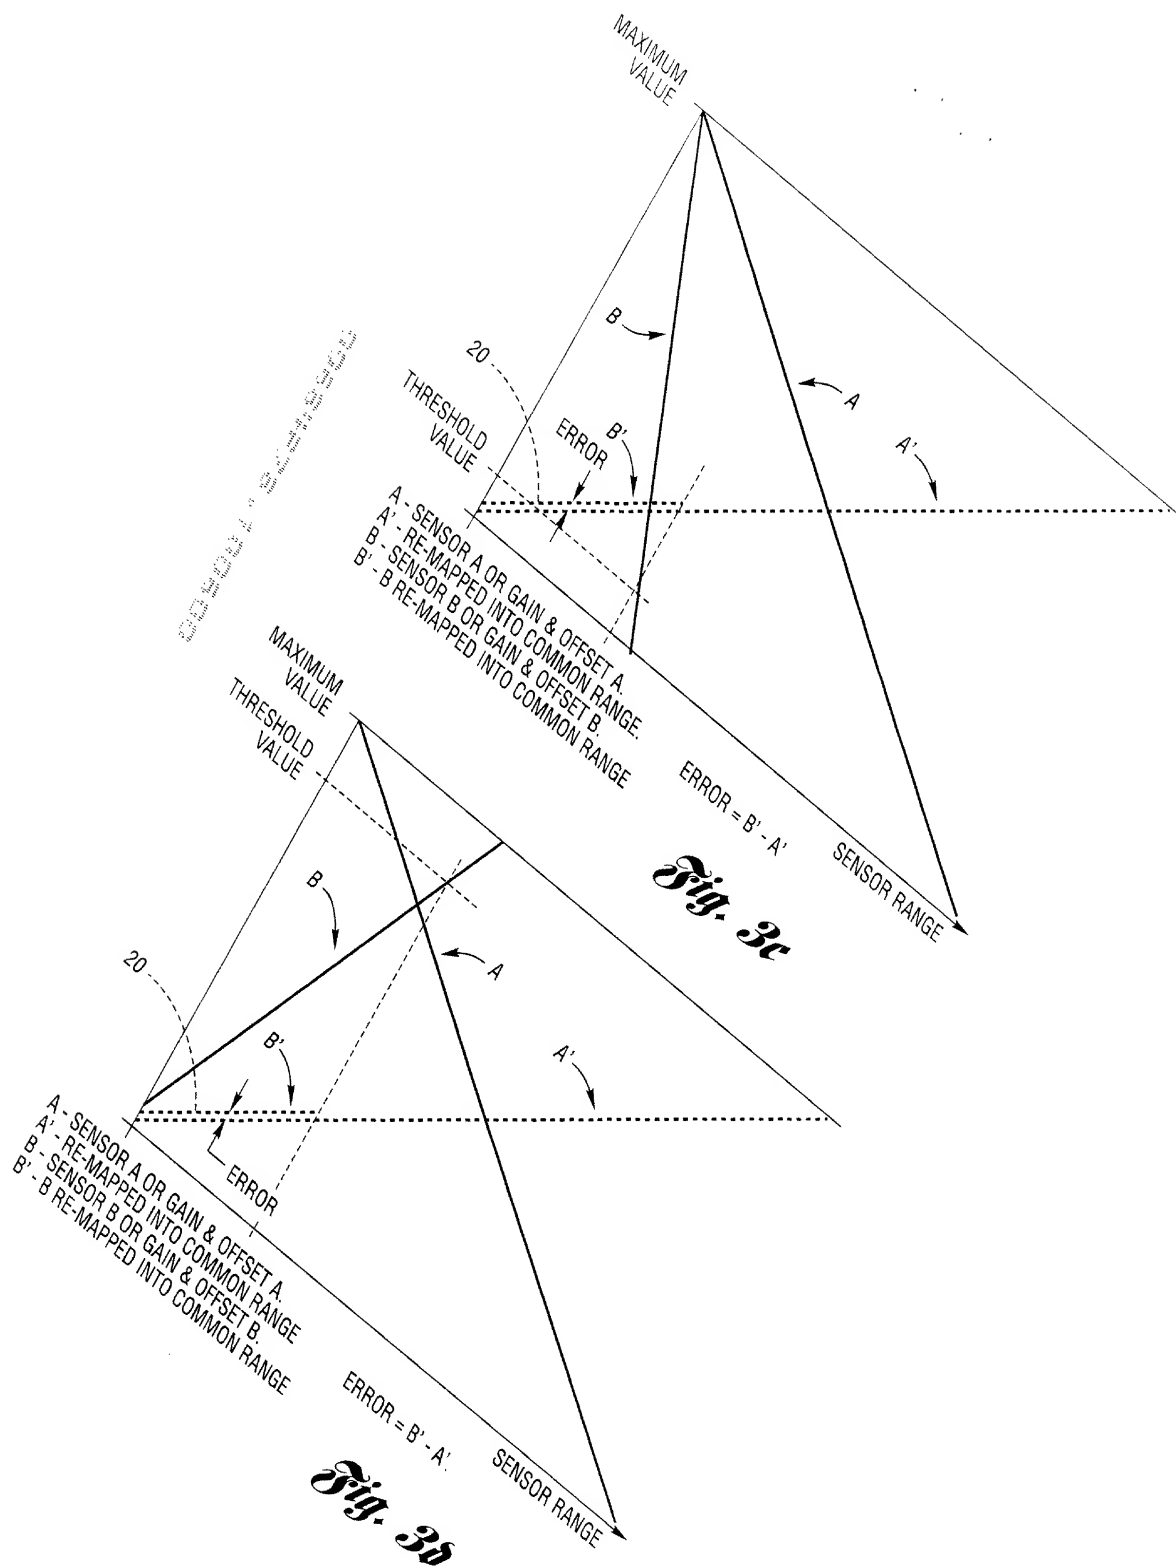


Fig. 3b



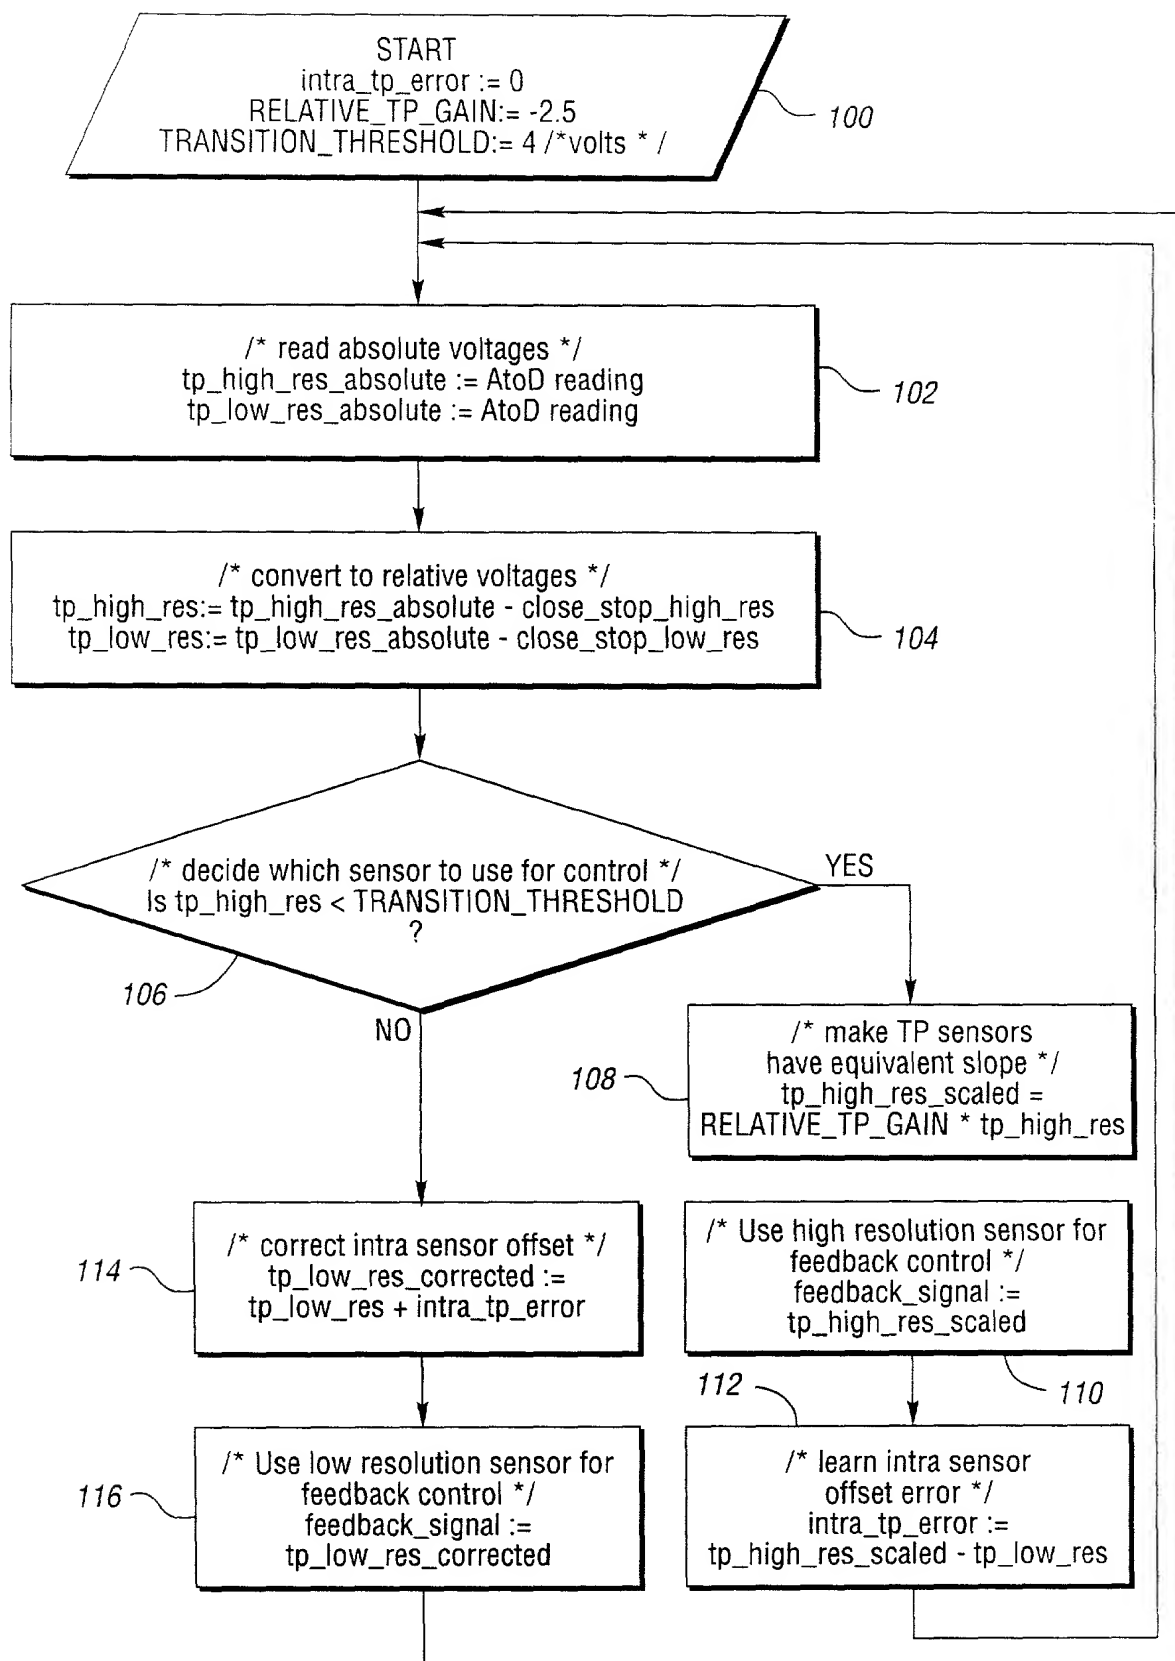


Fig. 4

DECLARATION AND POWER OF ATTORNEY - ORIGINAL APPLICATION**Attorney's Docket No.
FMCV0116PUS/
199-1368**

As a below named inventor, I hereby declare:

My residence, post office address and citizenship are as stated below next to my name;

I verily believe I am the original, first and sole inventor or an original, first and joint inventor of the subject matter that is claimed and for which a patent is sought on the invention entitled

METHOD AND SYSTEM FOR SEAMLESS TRANSITION BETWEEN MULTIPLE FEEDBACK RANGES

the specification of which is attached hereto.

I have reviewed and understand the contents of the specification identified above, including the claims.

I acknowledge my duty to disclose information of which I am aware that is material to the examination of this application in accordance with Section 1.56(a), Title 37 of the Code of Federal Regulations; and

as to application for patents or inventor's certificate on the invention filed in any country foreign to the United States of America, prior to this application by me or my legal representatives or assigns,

☒ no such applications have been filed, or

☐ such applications have been filed as follows:

COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 385(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith and to act on my behalf before the competent International Authorities in connection with any and all international applications filed by me. (List name and registration number)

Ralph E. Smith - 35,474

Frank A. Angileri - 36,733

Rhonda L. McCoy-Pfau - 37,887



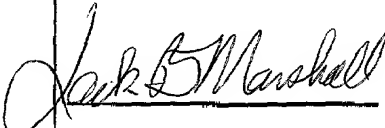
Leslie C. Hodges - 41,843

Address all correspondence and telephone calls to:

Ralph E. Smith
Brooks & Kushman
1000 Town Center Twenty-Second Floor
Southfield, Mi 48075-1351

Phone: 248-358-4400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME AND POST OFFICE ADDRESS OF INVENTOR:	RESIDENCE	CITIZENSHIP	SIGNATURE	DATE
Benjamin David Sweet 28755 San Carlos Southfield, Michigan 48076 US	Southfield, Michigan 48076 US	U.S.A		9/29/2000
Charles Francis Weber 8801 Rushton South Lyon MI 48178 US	South Lyon MI 48178 US	U.S.A		10/4/00
Jack Bruce Marshall 14369 Piedmont Detroit, Michigan 48223 US	Detroit, Michigan 48223 US	U.S.A		9/28/2000